

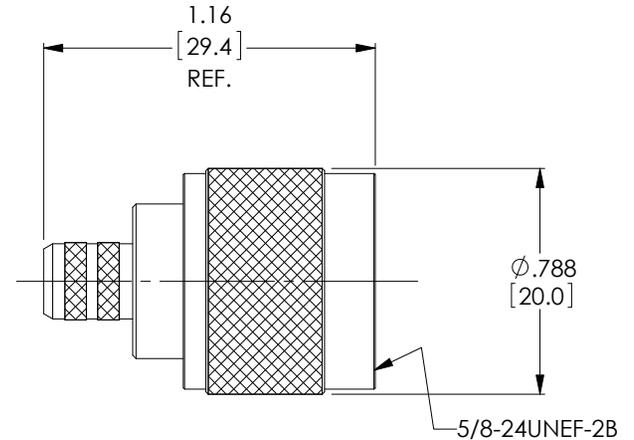




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ECN5776: UPDATED TO VENDOR SPECS, UPDATED FORMAT.	10/17/11	DFP
E	ECN 8479 UPDATE TO VENDOR SPECS, UPDATE CRIMP AND STRIP DIMS.	09/09/16	B.PUCHASKI


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATED
CENTER CONTACT	BRASS	GOLD PLATED
SHELL	BRASS	NICKEL PLATED
CRIMP FERRULE	BRASS	NICKEL PLATED
GASKET	SI-RUBBER	ORANGE
INSULATOR	PTFE	NATURAL
RETAINING RING	BRASS	NICKEL PLATED
GROUND RING	BRASS	NICKEL PLATED



RECOMMENDED  
FERRULE  
CRIMP SIZE



RECOMMENDED  
PIN  
CRIMP SIZE

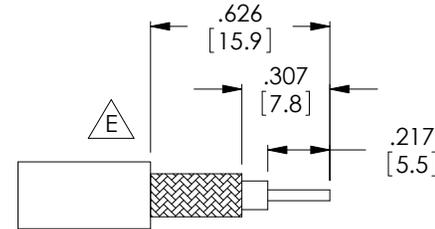

RECOMMENDED CABLE STRIPPING

NOTES:

**ELECTRICAL:**

IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: DC~ 11 GHz  
 VOLTAGE RATING: 1500 VOLTS PEAK  
 DIELECTRIC WITHSTANDING VOLTAGE: 2500 Vrms  
 INSERTION LOSS: .20 dB MAX.  
 CABLE RETENTION: 30 LBS PULL

**MISCELLANEOUS:**

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY

**REGULATORY COMPLIANCE:**

CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY B.PUCHASKI	07/17/09		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	CHECKED BY K.BURGNER	11/26/07	PRODUCT DESCRIPTION	
	APPROVED BY M.AUDAS	07/17/09	CON,N-MALE CRIMP RG6 CABLE	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE <b>A</b>	FSCM NO. <b>43321</b>
	COLOR VARIATIONS MAY OCCUR		DWG. NO. ANM-1A18	REV. <b>E</b>
			SCALE: NONE	CAD FILE: ANM-1A18.SLDRW
			SHEET 1 OF 1	