

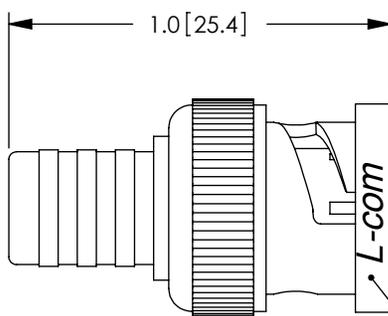


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 3682: REVISED DIM FROM DIA .29 TO DIA .25	10/31/08	D.FRISIELLO
G	ECN 3687: REVISED DIM FROM .25 DIA BY TO .29 DIA., NEW FORMAT	11/4/08	D.FRISIELLO

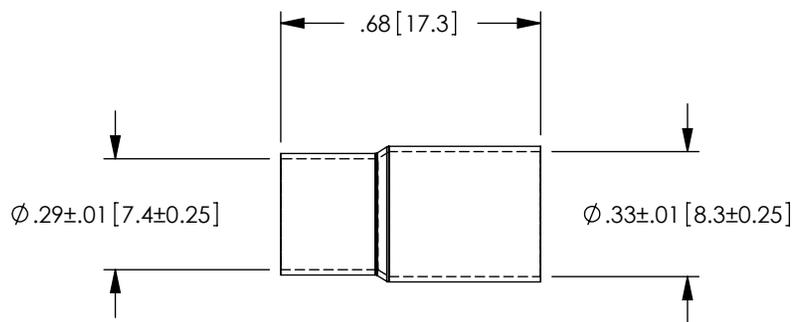


BAC032 TO APPEAR ON OPPOSITE OF L-COM

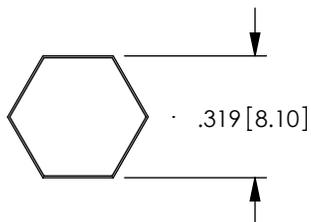

RECOMMENDED FERRULE CRIMP SIZE

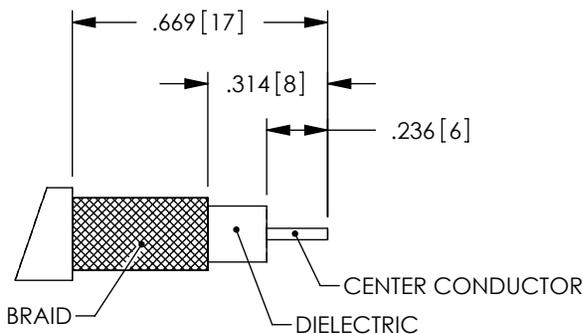

CABLE STRIPPING DIMENSIONS

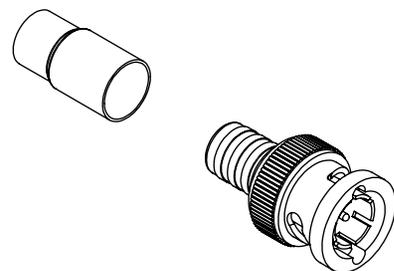

NOTES:

MATERIAL: BODY, FERRULE AND CENTER PIN: BRASS
 INSULATOR: ACETAL
 FINISH: BODY AND FERRULE: NICKEL PLATE, 100μ IN.
 CENTER PIN: GOLD PLATE, 3-5μ IN.
 RATING: 75 OHMS

UNASSEMBLED COMPONENTS SHALL BE PACKAGED IN A SINGLE POLY BAG.
 APPLICATION: RG6 COAXIAL CABLE.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $>12 [305] \leq 60 [1524] = +2 [51] / -0$ $>60 [1524] \leq 120 [3048] = +4 [102] / -0$ $>120 [3048] \leq 300 [7620] = +6 [152] / -0$ $>300 [7620] = +5\% / -0\%$ ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	APPROVALS DRAWN BY C.MCCORMICK	DATE 04/30/2001		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CHECKED BY D.PARHAM	04/30/2001		CATEGORY COAXIAL	
	APPROVED BY R.CARRICK	05/04/01	PRODUCT DESCRIPTION 75 OHM BNC CONNECTOR		
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. BAC032
		SCALE: NONE		CAD FILE: BAC032.SLDDRW	
			REV. G	SHEET 1 OF 1	