
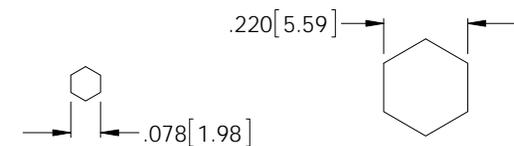
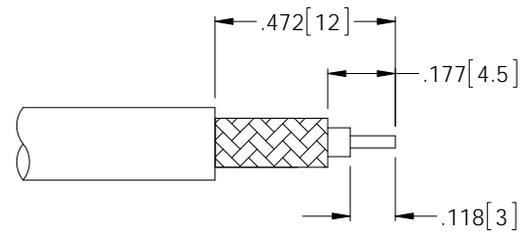
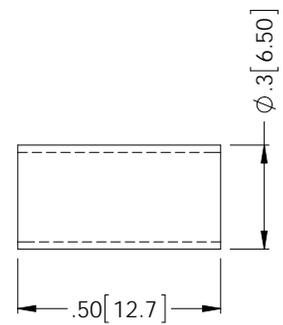
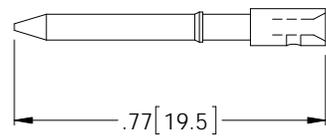


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/07/07	R.POLUBINSKI
B	ECN 2983 CABLE STRIPPING DIMS ADDED, CRIMP DIMS CHANGED	09/10/07	R.POLUBINSKI
C	ECN 3242 CHANGE DIM FROM .68 TO .77[19.55]	03/19/08	D.FRISIELLO
D	ECN 8269 UPDATE PER NEW SPECS	02/25/16	B.PUCHASKI

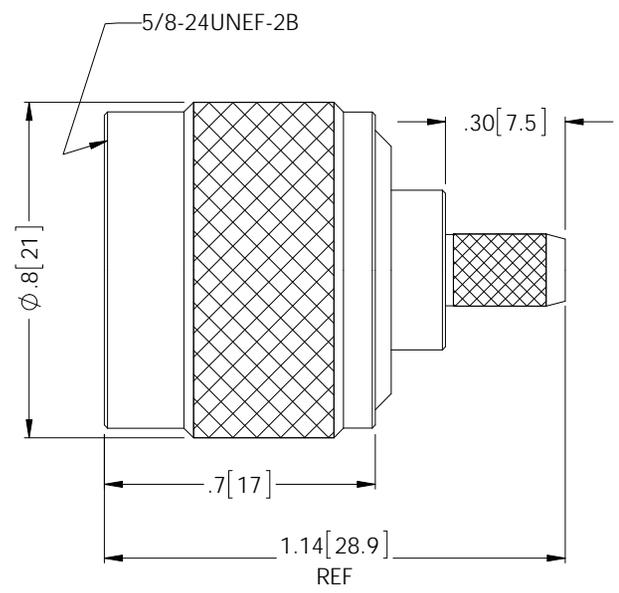

NOTES:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0 - 11GHz
 VOLTAGE RATING: 1000 V rms
 INSULATOR RESISTANCE: $\geq 5G$ OHM
 DIELECTRIC WITHSTANDING VOLTAGE: 2500V rms
 VSWR: ≤ 1.3

ALL DIMENSIONS ARE FOR REFERENCE ONLY.


COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIO PKG-00012.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

RECOMMENDED CABLE STRIPPING

RECOMMENDED PIN CRIMP DIMENSION

RECOMMENDED FERRULE CRIMP DIMENSION

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = $\pm .1$ [2.54] .XX = $\pm .01$ [.25] .XXX = $\pm .005$ [.13] ANGULAR TOLERANCES: ALL = $\pm 1^\circ$	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY R.POLUBINSKI	08/07/07			
	CHECKED BY J.ROBERTS	08/16/07	CATEGORY COAXIAL		
	APPROVED BY J.ROBERTS	08/16/07	PRODUCT DESCRIPTION TYPE N-MALE CRIMP, RG58 CABLE		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. BAC519	REV. D
		SCALE: NONE	CAD FILE: BAC519.SLDDRW		SHEET 1 OF 1