

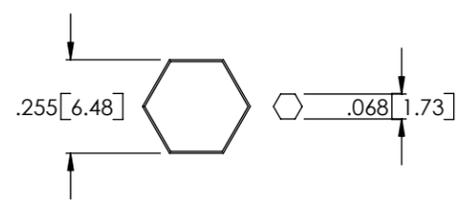
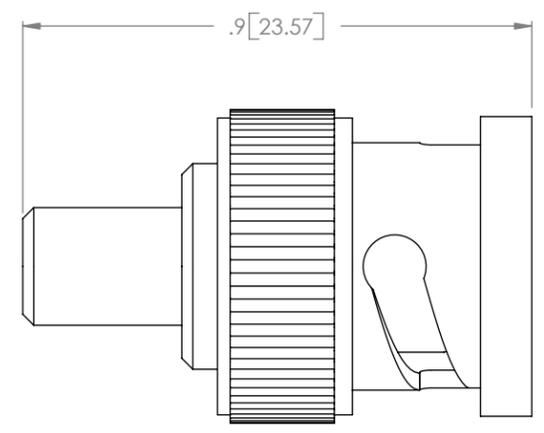
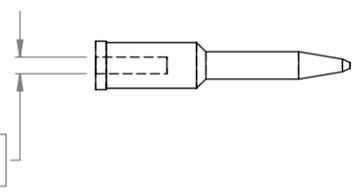


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
E	ECN 3165: UPDATE DWG FORMAT	1/21/08	D.GRIFFIN

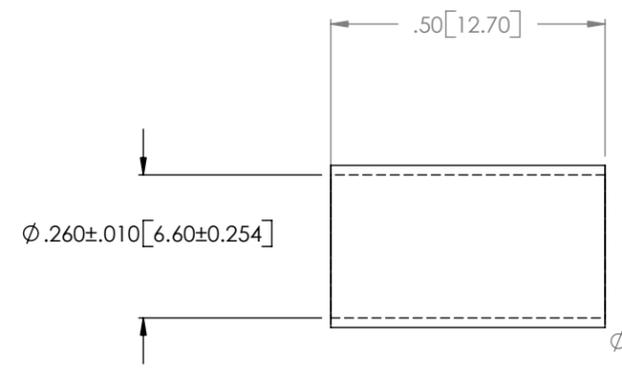

RECOMMENDED FERRULE AND PIN CRIMP SIZES

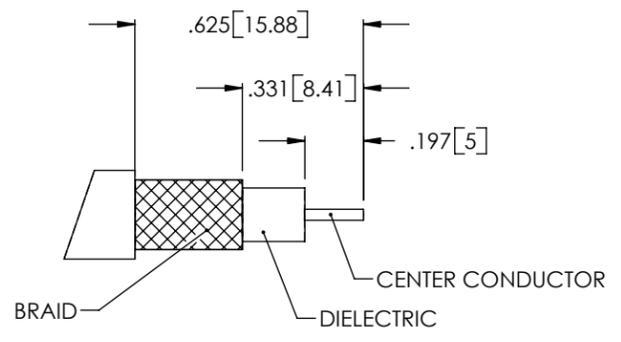

RECOMMENDED CABLE STRIPPING DIMENSIONS

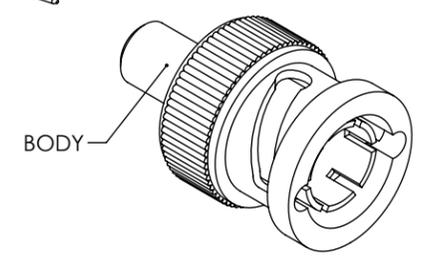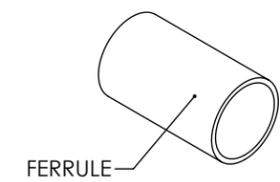

NOTES:

MATERIAL:
 BODY: BRASS
 FERRULE: BRASS OR COPPER ALLOY
 PIN: BRASS
 INSULATOR: ACETAL

FINISH:
 BODY: NICKEL PLATE
 FERRULE: NICKEL PLATE
 PIN: GOLD PLATE

ELECTRICAL:
 IMPEDANCE: 75 OHM

PACKAGING:
 INDIVIDUALLY PACKAGE EACH ASSEMBLY UTILIZING APPROPRIATE SIZED BAG

APPLICATION:
 RG59 & RG62 COAXIAL CABLE ASSEMBLIES

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES TO BE:
 .X ±.1 [2.5] ANGLES ±2°
 .XX ±.01 [.25]
 .XXX ±.005 [.13]
 OVERALL CABLE LENGTH TOL:
 ≤ 60 [1524] +3 [76.2] / -0
 > 60 [1524] +5% / -0%

APPROVALS	DATE
DRAWN BY MCCORMICK	01/17/2006
CHECKED BY D.PARHAM	01/17/2006
APPROVED BY R.CARRICK	01/17/2006



CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com 45 BEECHWOOD DRIVE
 NORTH ANDOVER, MA 01845

CATEGORY: COAXIAL
 PRODUCT DESCRIPTION: CONN BNC M RG59 & RG62 CRIMP

SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	BAC836A-59	E