



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	ECN 4789: CN RELEASE	31.MAY.2010	Bill_Zhang
D	ECN 5013: CHG'D HOOD STYLE ON MALE SIDE, ADDED GOLD CALLOUT ON BOTH CONNS	9/7/10	D. CASTRO
E	ECN 9983: REMOVE PIN MARKING FROM BOTH CONNECTOR FACE, REMOVE ROHS COMPLIANT STATEMENT	08/15/2019	B.GATES

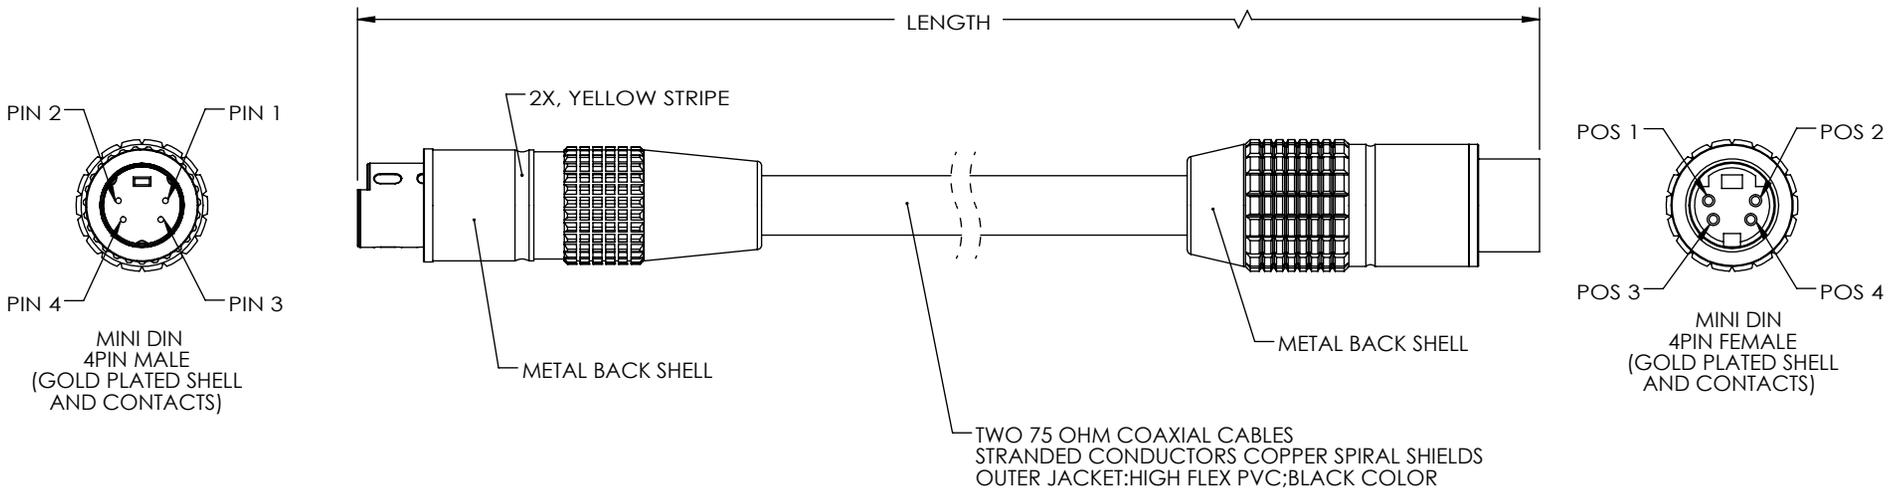

WIRING DIAGRAM

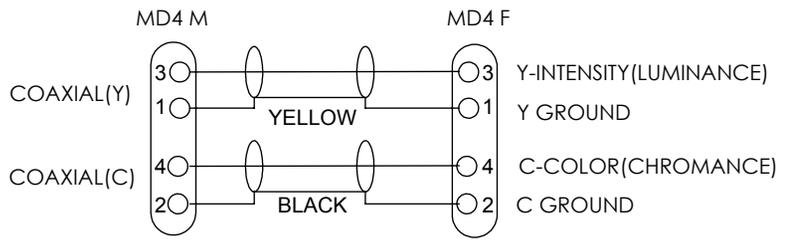

MODEL NUMBER	LENGTH	
	FEET	METERS
CCD244MF-1	1.0	0.31
CCD244MF-2	2.0	0.61
CCD244MF-3	3.0	0.91
CCD244MF-5	5.0	1.52
CCD244MF-7.5	7.5	2.29
CCD244MF-10	10.0	3.05
CCD244MF-20	20.0	6.10

NOTES

1. CABLES TO BE TESTED FOR CONTINUITY
2. CABLES TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-com PACKAGING SPEC. PS-0031

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY Bill_Zhang	05/21-'10		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2[5.08] .XX = ± .02[.51] .XXX = ±.005[.13]	CHECKED BY Frank_Mao	05/21-'10	PRODUCT DESCRIPTION	CA DUAL SVHS M/ F ASMBL
PROJECTION	APPROVED BY Thomas_Lu	05/21-'10	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	REV. E
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CCD244MF
		SCALE: NONE	CAD FILE: CCD244MF.SLDDRW	SHEET 1 OF 1