


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3779: DEFINED COLOR TO LIGHT GRAY, NEW FORMAT	1/7/09	D.FRISIELLO
F	ECN 6604: REVISED LOGO'S, ADDED PANTONE 400C, ALL NOTES	3/20/13	D.FRISIELLO
G	ECN 7231: REVISE DESCRIPTION FOR "HOOD", NEW FORMAT, ROHS NOTE	1/9/14	D.FRISIELLO

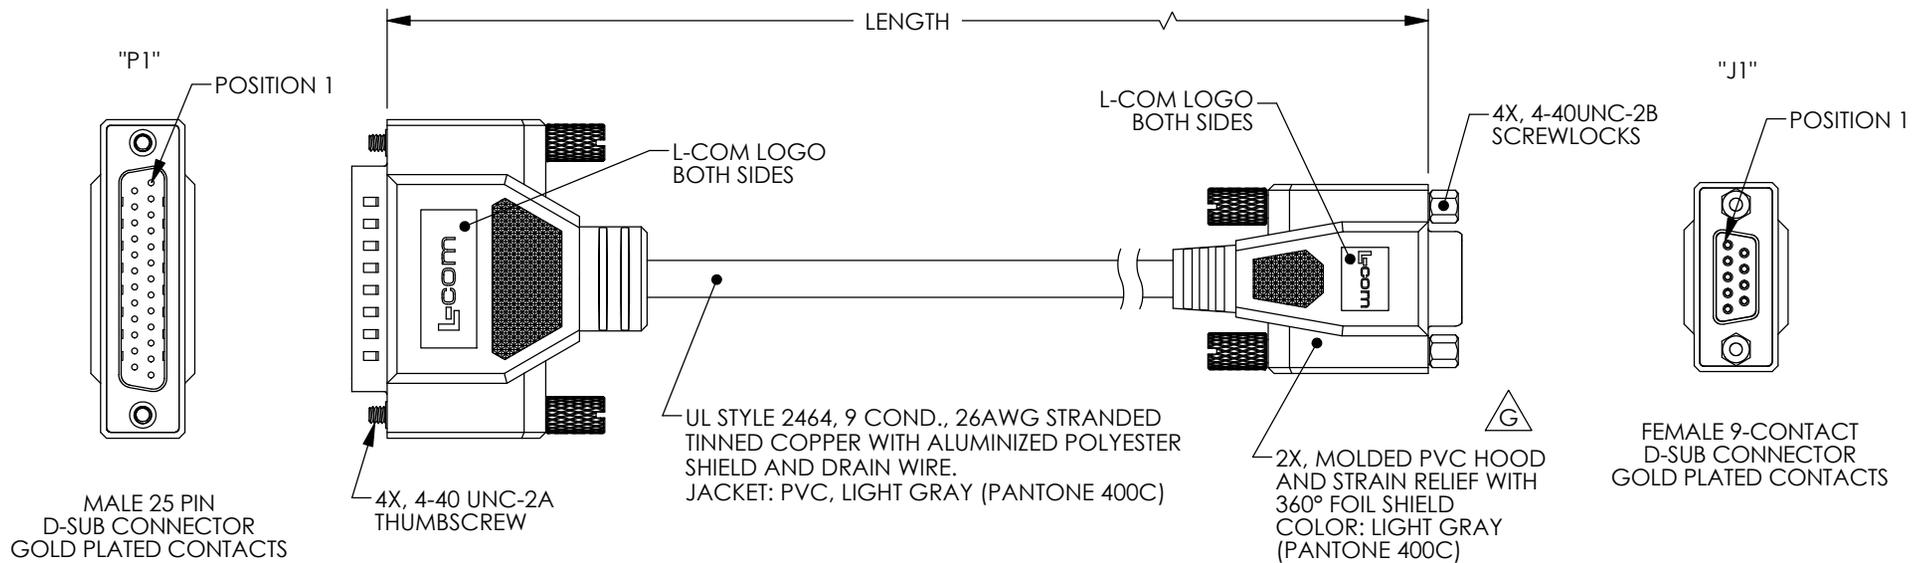

WIRING MAP		
"P1"	WIRE COLOR	"J1"
2	BLACK	2
3	GRAY	3
6, 8	RED	4
7	GREEN	5
20	BROWN	1, 6
5	BLUE	7
4	ORANGE	8
1, SHELL	DRAIN WIRE	SHELL

MODEL NUMBER	LENGTH	
	FEET	METERS
CNULL259MF-5	5.0	1.52
CNULL259MF-10	10.0	3.05
CNULL259MF-25	25.0	7.62

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY MCCORMICK CHECKED BY D.PARHAM APPROVED BY R.CARRICK	02/15/02	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY D-SUBMINIATURE	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION CABLE, DB25M/DB9F NULL MODEM	
	CSNULL-FS01	SIZE A	FSCM NO. 43321
		DWG. NO. CSNULL259MF	REV. G
		SCALE: NONE	CAD FILE: CSNULL259MF.SLDDRW
			SHEET 1 OF 1