

6

5

4

3


2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
E4	G	UPDATED PER ECO-13224	01/09/2024	HBAKKE	DGUST

POSITION 1

"P1"
MALE 9-PIN
D-SUB CONNECTOR
GOLD PLATED PINS

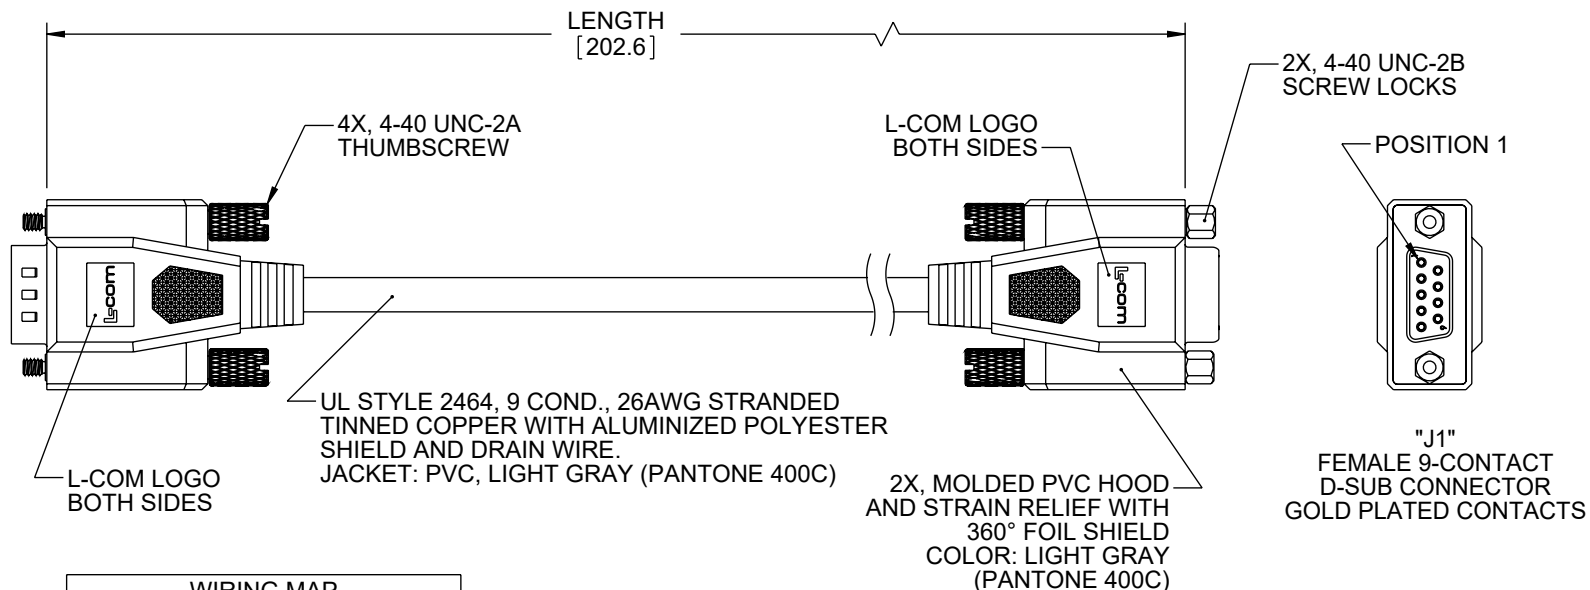

WIRING MAP		
"P1"	WIRE COLOR	"J1"
1	BLACK	1
2	GRAY	3
3	RED	2
4	GREEN	4
5	BROWN	5
6	BLUE	6
7	ORANGE	7
8	YELLOW	8
9	PURPLE	9
SHELL	DRAIN WIRE	SHELL



ITEM NUMBER	LENGTH	
	FEET	METERS
CSNULL9MF-5	5.0	1.52
CSNULL9MF-10	10.0	3.05
CSNULL9MF-25	25.0	7.62

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENTLY RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		<div>L-com®</div> <div>an INFINITE® brand</div> <div>Website: www.L-com.com</div> <div>Phone: 1.800.341.5266 1.978.682.6936</div>		<div></div> <div>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</div>	
TOLERANCES:				SCALE	SHEET
X = ±.2 [5] XX = ±.02 [0.5] XXX = ±.005 [0.13]		FRACTIONS 1/32 ANGLES ± 1°		NONE	1 OF 1
CABLE LENGTH TOLERANCES: ≤12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DESCRIPTION			
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY		DELUXE NULL MODEM REVERSER CABLE, DB9 MALE/FEMALE			
SIZE	CAGE CODE	DRAWN BY	ITEM NO.		REV
A	43321		CSNULL9MF		G

6

5

4

3

2

1