
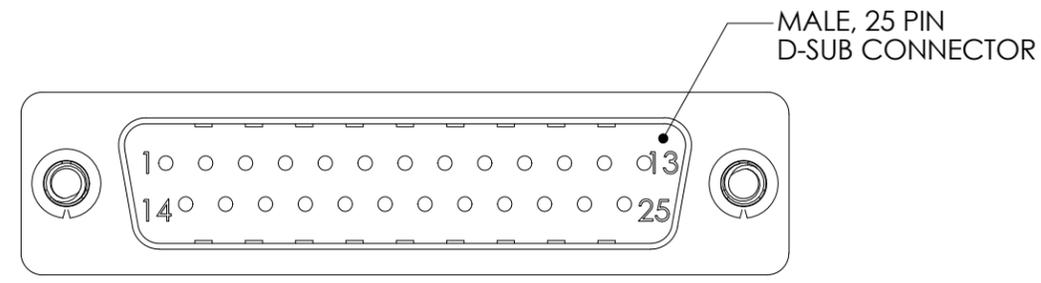
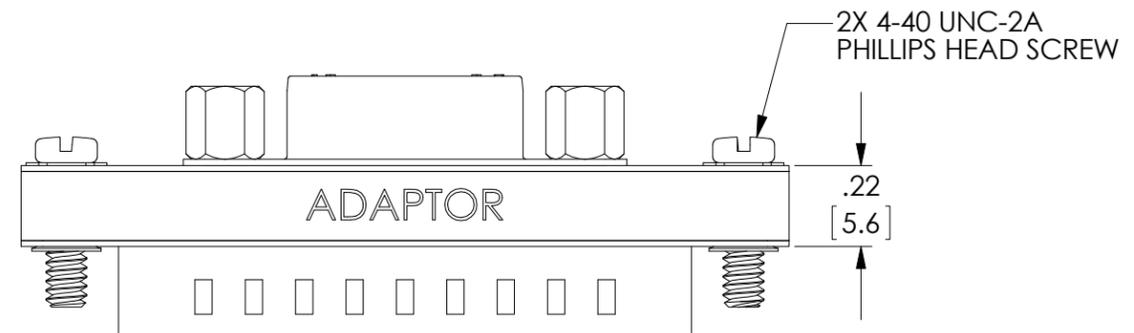
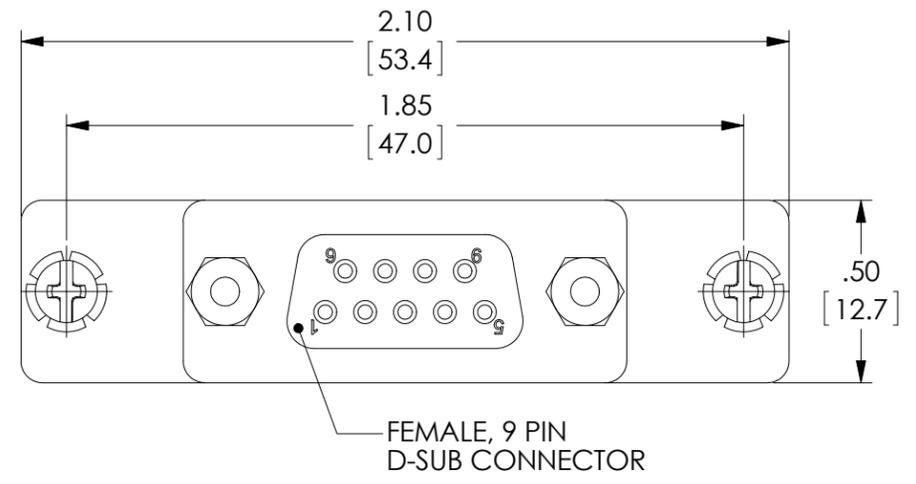
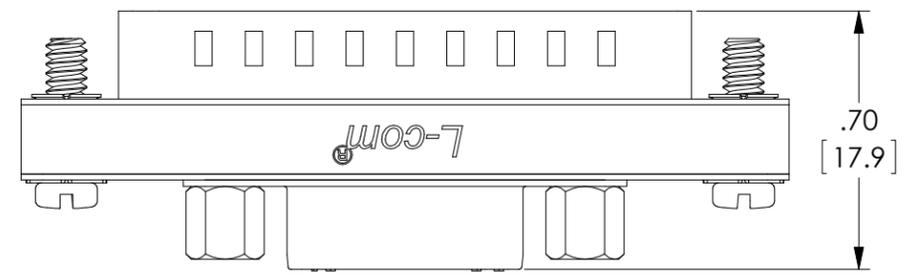


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	DRAWING REPLACES DMA010FM-OD1	9/29/14	D. DESJARDIN

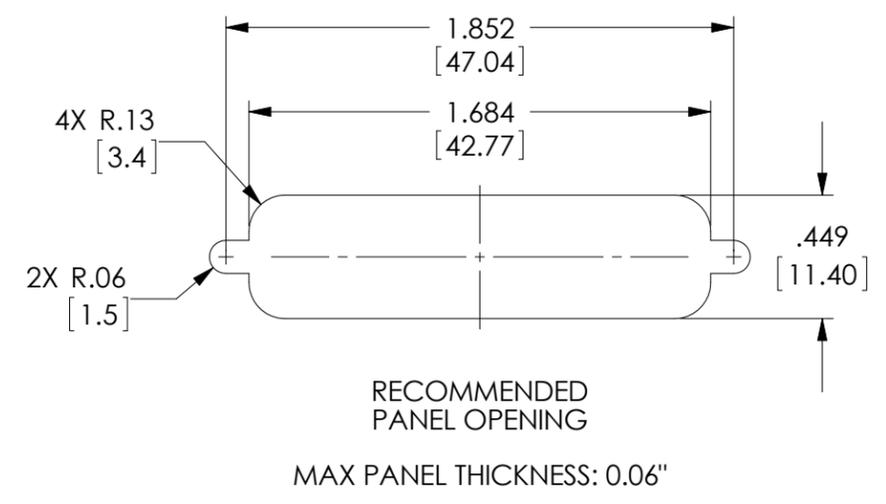

WIRING MAP	
"J1" DB9F	"P1" DB25M
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHELL	SHELL

**NOTES:**

**MATERIALS:**  
SHELL: COLD ROLLED STEEL  
CONTACTS: BRASS  
INSULATOR: PBT UL94-V0 RATED


**FINISH:**  
SHELL: TIN PLATED  
CONTACT: GOLD FLASH OVER NICKEL

**LABELING:**  
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.  
"ADAPTOR" FONT ARIAL BOLD, TEXT HEIGHTS; .085"  
TEXT COLOR; WHITE.

**PACKAGING:**  
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  
OVERALL CABLE LENGTH TOLERANCE:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤60 [1524] = +2[51] / -0  
>60 [1524] ≤120 [3048] = +4 [102] / -0  
>120 [3048] ≤300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0%  
ALL OTHER DIMENSIONAL TOLERANCES:  
X = ±.2 [5.08]  
.XX = ±.02 [5.1]  
.XXX = ±.005 [1.3]



APPROVALS	DATE
DRAWN BY R.CARRICK	12/03/2001
CHECKED BY MCCORMICK	12/03/2001
APPROVED BY D.PARHAM	12/03/2001

**L-com** Global Connectivity  
45 BEECHWOOD DRIVE  
NORTH ANDOVER, MA  
01845

CATEGORY		D-SUBMINIATURE	
PRODUCT DESCRIPTION			
ADPT, SER PORT DB9F/DB25M			
SIZE	FSCM NO.	DWG. NO.	REV.
<b>B</b>	<b>43321</b>	<b>DMA010FM</b>	<b>A</b>
SCALE: 2:1		CAD FILE: DMA010FM.SLDDRW	SHEET 1 OF 1