


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

**RoHS Compliant** ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/15/13	D.GRIFFIN

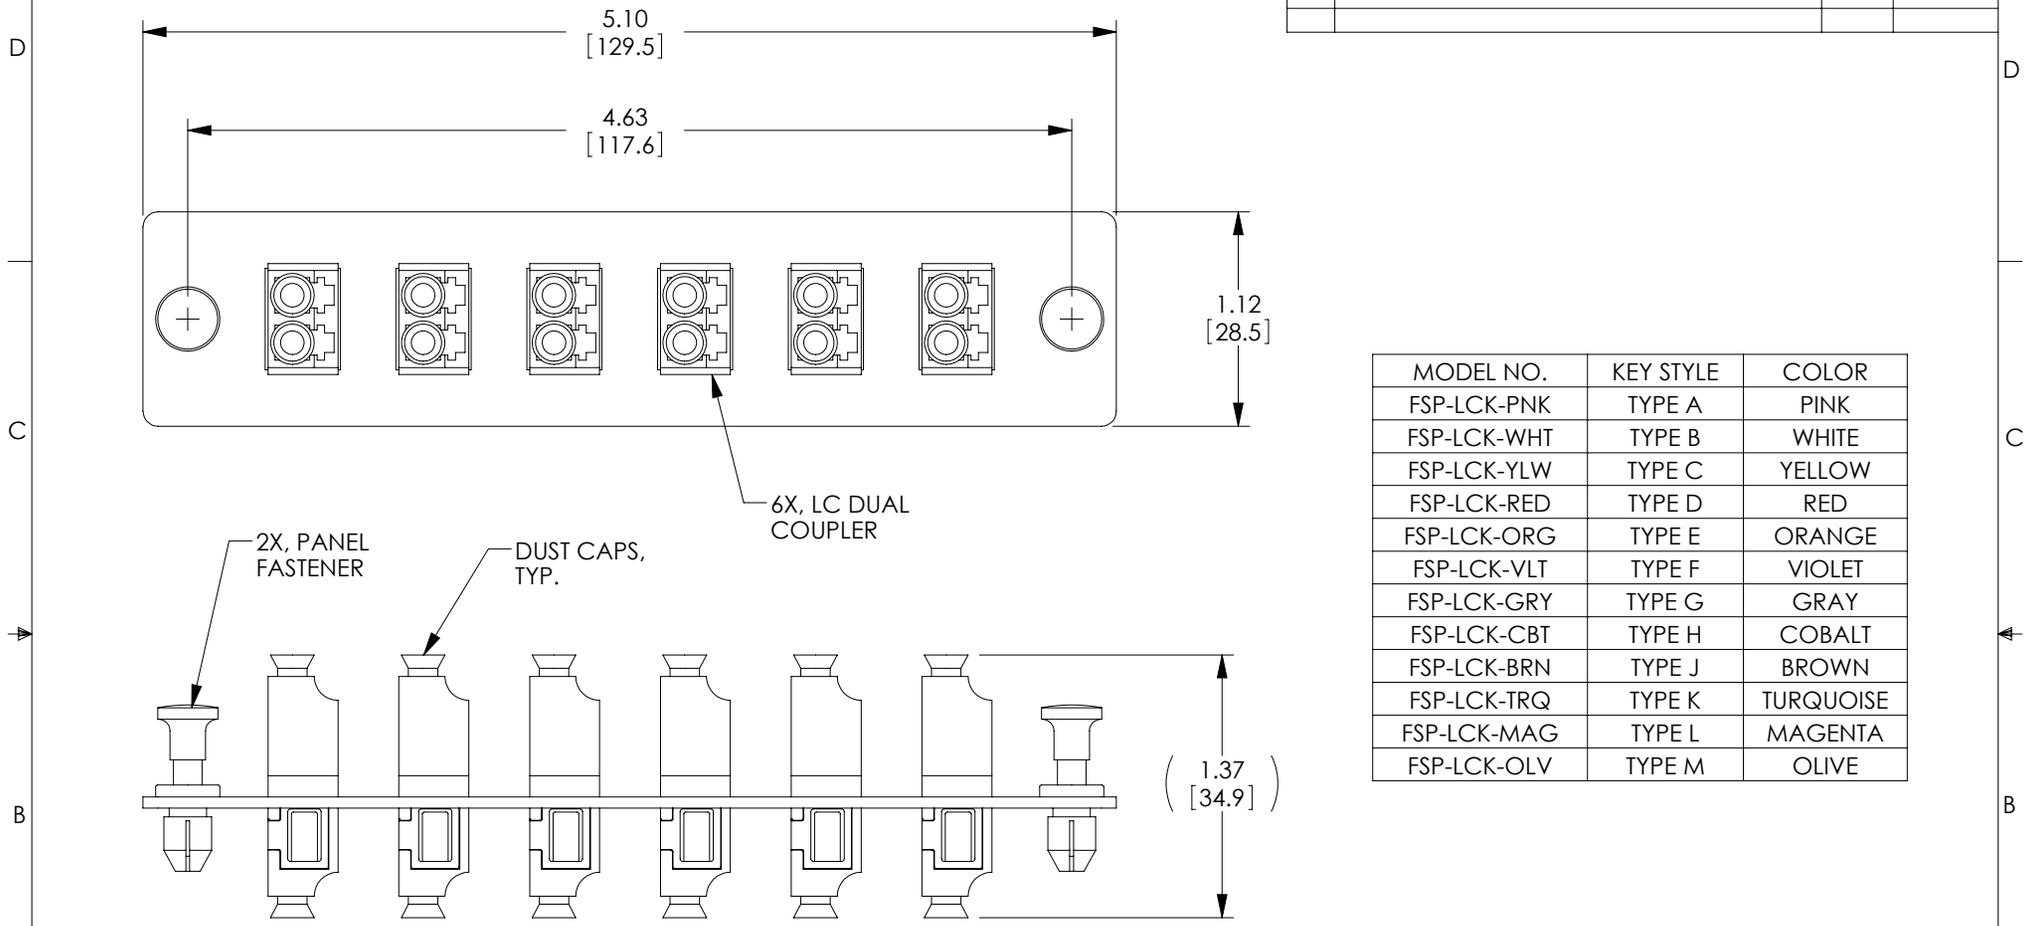

MODEL NO.	KEY STYLE	COLOR
FSP-LCK-PNK	TYPE A	PINK
FSP-LCK-WHT	TYPE B	WHITE
FSP-LCK-YLW	TYPE C	YELLOW
FSP-LCK-RED	TYPE D	RED
FSP-LCK-ORG	TYPE E	ORANGE
FSP-LCK-VLT	TYPE F	VIOLET
FSP-LCK-GRY	TYPE G	GRAY
FSP-LCK-CBT	TYPE H	COBALT
FSP-LCK-BRN	TYPE J	BROWN
FSP-LCK-TRQ	TYPE K	TURQUOISE
FSP-LCK-MAG	TYPE L	MAGENTA
FSP-LCK-OLV	TYPE M	OLIVE

Ceramic Sleeve couplers are suitable for Single mode or Multimode applications.

**NOTES:**

1. PANEL MATERIAL: .06 THICK CARBON STEEL.
2. PANEL FINISH: FLAT BLACK.
3. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
4. SUPPLIED WITH DUST CAPS ON COUPLERS.
5. RECOMMENDED MOUNTING HOLE FOR MATING FASTENER:  $\phi .252 \pm .002$
6. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $>12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $>60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $>120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $>300$ [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ .XX = $\pm .02$ .XXX = $\pm .005$	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY D.GUITADAURO APPROVED BY D.GALLAGHER	DATE 2/15/13 2/15/13 2/15/13	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY FIBER OPTICS		PRODUCT DESCRIPTION FBR PNL 6 LC KEYED SM/MM	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. FSP-LCK	REV. <b>A</b>
SCALE: NONE		CAD FILE: FSP-LCK.SLDDRW		SHEET 1 OF 1	