
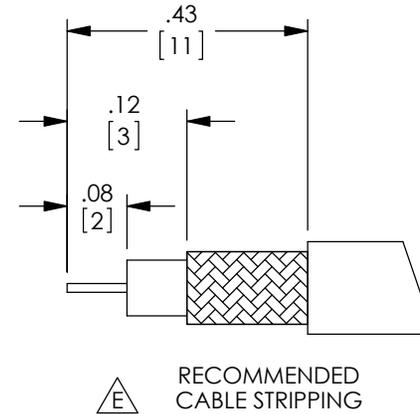
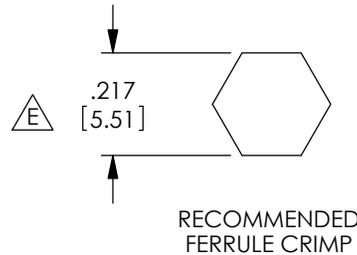



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7358: UPDATE PER NEW SUPPLIER SPEC.	3/26/14	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
SHELL	BRASS	GOLD
BODY	BRASS	GOLD
INSULATOR	PTFE	---
PIN	BRASS	GOLD
FERRULE	BRASS	GOLD

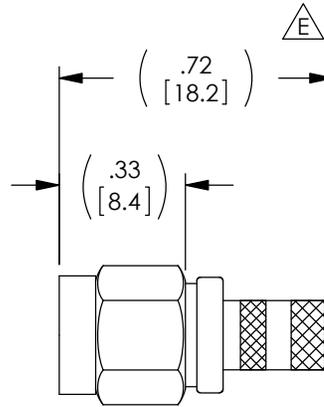

**NOTES:**

**ELECTRICAL:**  
 IMPEDANCE: 50 OHMS  
 WITHSTAND VOLTAGE: 2500V  
 FREQUENCY RANGE: 0~6 GHz  
 VSWR: ≤1.50 @ 0~6 GHz  
 DURABILITY: ≥ 500 CYCLE  
 CABLE RETENTION: > 40 POUNDS

**MISCELLANEOUS:**  
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

⚠ CENTER PIN IS SOLDER TYPE ONLY.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS C.MCCORMICK CHECKED BY D.PARHAM APPROVED BY R.CARRICK	DATE 11/30/2004 11/30/2004 11/30/2004		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY COAXIAL	PRODUCT DESCRIPTION CONN SMA M LMR200 CRIMP	
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>HPC201</b>
	SCALE: NONE		CAD FILE: HPC201.SLDDRW	SHEET 1 OF 1	