

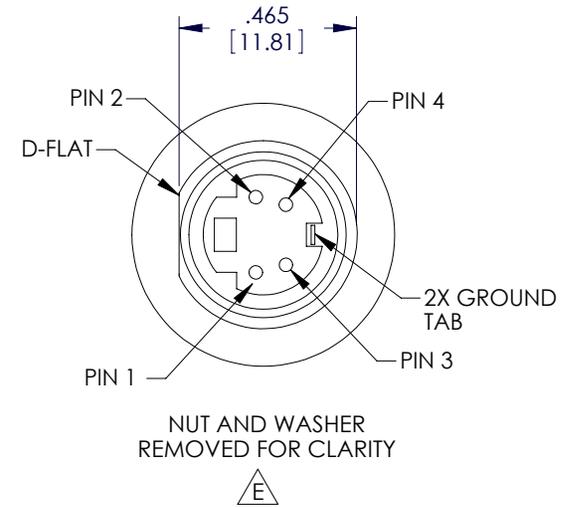


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 9926; REMOVED PIN MARKING, REMOVED ROHS COMPLIANT STATEMENT	06/24/2019	BGATES

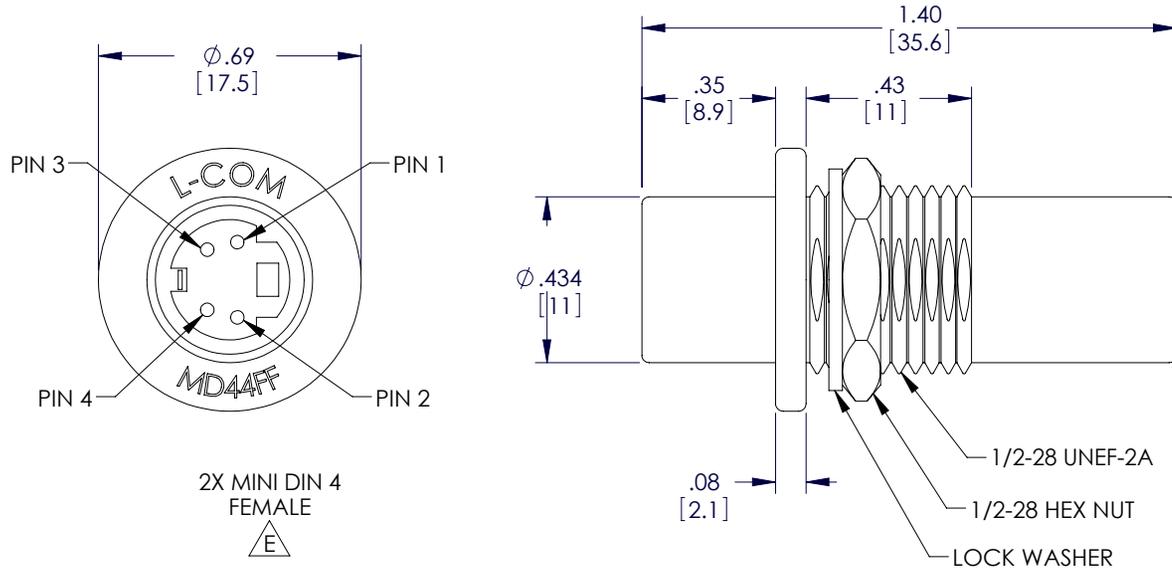

RECOMMENDED PANEL OPENING

NOTES:

1. D-FLAT AND RECTANGULAR SLOT ARE PARALLEL TO EACH OTHER.
2. PINS ARE WIRED STRAIGHT THROUGH.
3. FINISH: NICKEL PLATED BRIGHT.
4. INTERNAL TOOTH LOCK WASHER AND
5. HEX NUT INCLUDED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DZINN	06/24/2019		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY DFRISIELLO	06/24/2019	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY BGATES	06/24/2019	MIN DIN-4 ADAPTOR	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. MD44FF	REV. E
			SCALE: NONE	CAD FILE: MD44FF.SLDDRW
				SHEET 1 OF 1