

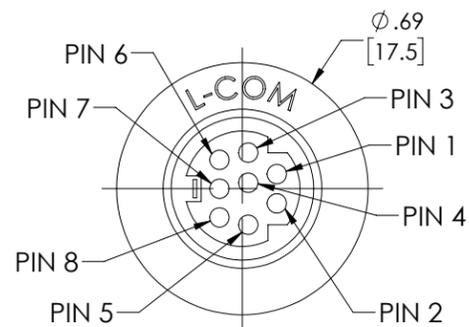


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED BY
A	DRAWING REPLACES MD88FF-OD1	10/13/2014	DDESJARDIN
B	ECN 9926: REMOVED PIN MARKINGS, REMOVED ROHS STATEMENT	06/25/2019	BGATES

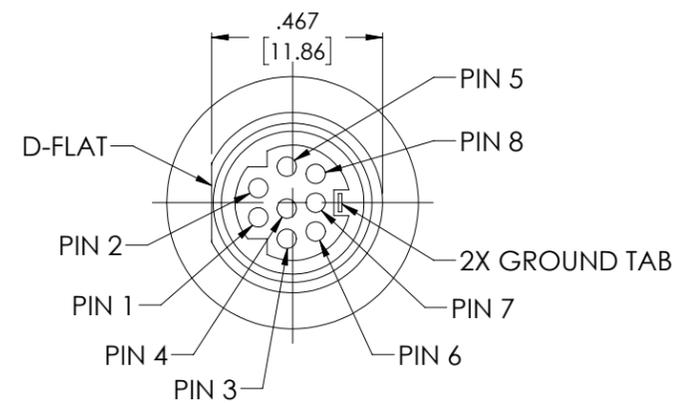

2X 8 POSITION
MINIATURE CIRCULAR DIN

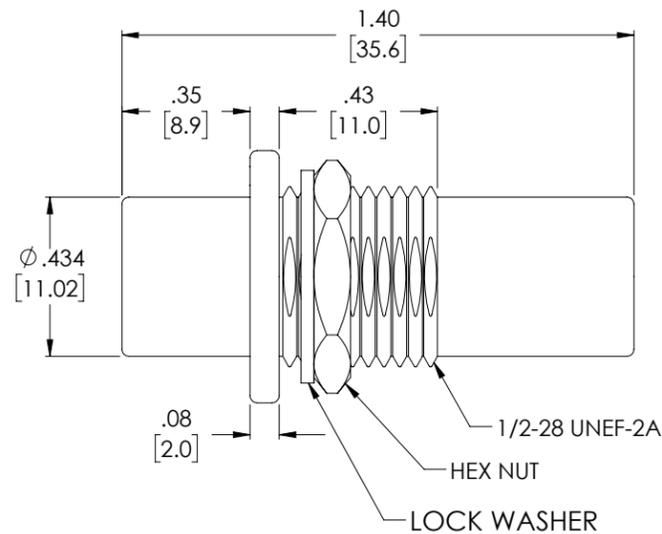

NUT AND WASHER
REMOVED FOR CLARITY

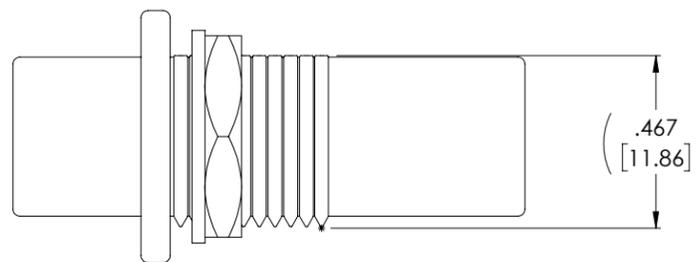


RECOMMENDED
PANEL OPENING

NOTES:

1. THE D-FLAT ON THE THREADED BARREL OF ADAPTOR MUST BE ALIGNED AS SHOWN ABOVE.
2. PINS ARE WIRED STRAIGHT THROUGH.
3. FINISH: NICKEL PLATED BRIGHT.
4. INTERNAL TOOTH LOCK WASHER AND HEX NUT INCLUDED.
5. ADAPTOR SHALL BE TESTED FOR CONTINUITY.
6. ADAPTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.



UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2[51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [5.1]
.XXX = ±.005 [1.3]



APPROVALS	DATE
DRAWN BY DZINN	06/25/2019
CHECKED BY DFRISIELLO	06/25/2019
APPROVED BY BGATES	06/25/2019

CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY
COLOR VARIATIONS
MAY OCCUR

L-com Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY I/O PRODUCTS

PRODUCT DESCRIPTION
ADPT, MINI-DIN 8 F/F BULKHEAD

SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	MD88FF	B

SCALE: 2:1 CAD FILE: MD88FF.SLDDRW SHEET 1 OF 1