




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/24/12	D.GRIFFIN
B	ECN 6881: REVISED PANEL OPENING DIMENSIONS. ADDED ROHS	6/11/13	D. DESJARDIN
C	ECN 7863: RE-DESIGN OF 3D MODEL, REVISED ROHS	3/16/15	D. FRISIELLO
D	ECN 7933: REMOVED COLOR IVORY FROM TABLE	5/4/15	D. CASTRO

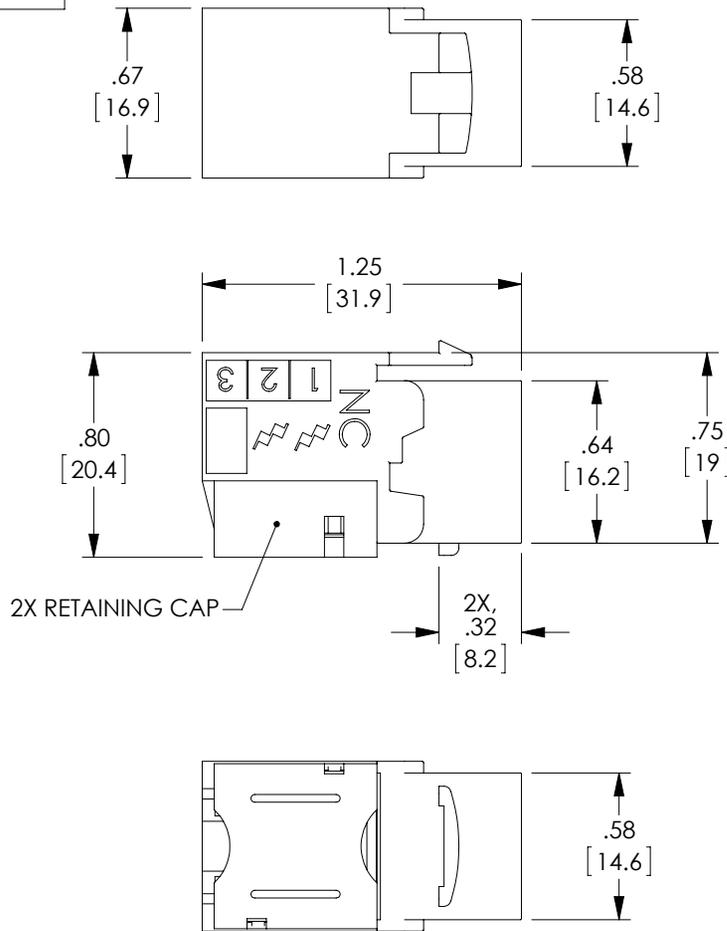

**NOTES:**

**MATERIAL:**  
 HOUSING: ABS, UL94V-0 RATED, COLOR: SEE TABLE  
 CONTACTS: PHOSPHOR BRONZE  
 IDC PIN: PHOSPHOR BRONZE

**MISCELLANEOUS:**  
 CATEGORY 3 RATED  
 IDC 110 PUNCHDOWN TERMINALS  
 CONDUCTOR ACCEPTANCE: 24 TO 26AWG

COMPONENT SHALL BE INDIVIDUALLY PACKAGE IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS FOR REFERENCE ONLY

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

MODEL NUMBER	COLOR
MJS110RJ12-WT	WHITE



RECOMMENDED  
 PANEL OPENING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.PARHAM	01/23/2012		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CHECKED BY M.SEDLESKI	01/23/2012	CATEGORY <b>TELECOM / MODULAR</b>	
	APPROVED BY D.GALLAGHER	01/24/2012	PRODUCT DESCRIPTION <b>JACK CAT3 RJ12/110</b>	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. MJS110RJ12
		SCALE: NONE	CAD FILE: MJS110RJ12.SLDDRW	REV. <b>D</b>
				SHEET 1 OF 1