
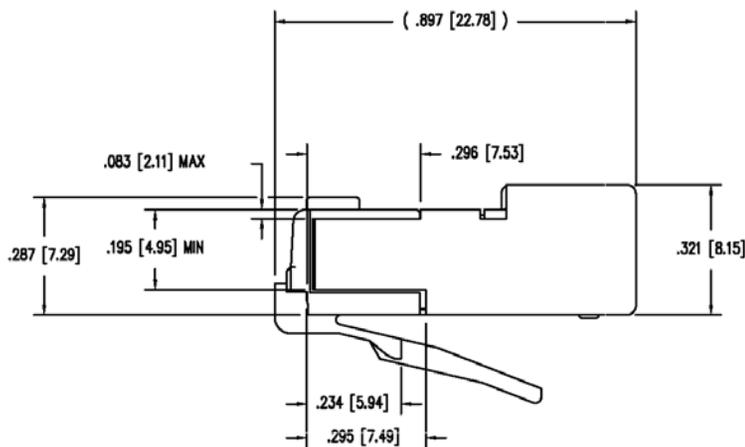

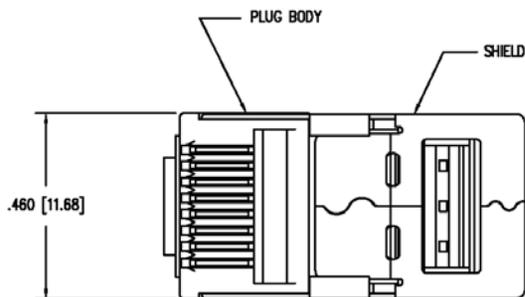


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/5/12	D.FRISIELLO

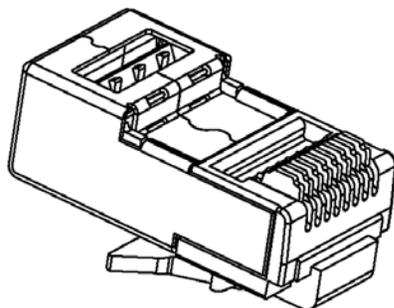

NOTES:

PLUG KITS CONSISTS OF: PRE-INSERTED PLUG BODY, (UNIBODY).

MATERIALS:

FRONT HOUSING PLASTIC: CLEAR POLYCARBONATE, UL94-V0
CONTACTS: PHOSPHOR BRONZE, 50μ GOLD PLATING.

CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94mm] TO .042 [1.07mm] OUTSIDE DIAMETER OF INSULATION.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE PACKAGED IN QUANTITY OF 50, IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D.FRISIELLO	10/5/12				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ±.005	CHECKED BY D.GALLAGHER	10/5/12	CATEGORY MODULAR			
	APPROVED BY D.GALLAGHER	10/5/12	PRODUCT DESCRIPTION PLUG RJ45(8X8) CAT5E SHLD 50PK			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TSP4088C5S	REV. A
SCALE: NONE			CAD FILE: TSP4088C5S.SLDDRW		SHEET 1 OF 1	